


NOTES:


1. ALLOW FOR SILT AND DEBRIS BUILDUP WHEN DETERMINING CLEAR WORKING DEPTH
2. REFER TO S2 SKIMMER IOM FOR INSTALLATION OF SKIMMER

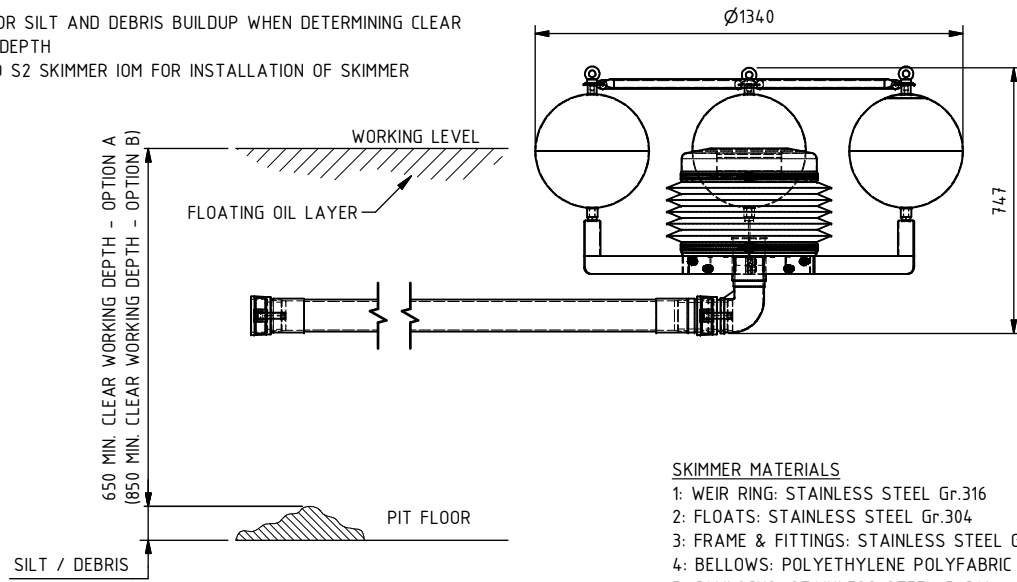


SKIMMER MATERIALS

- 1: WEIR RING: STAINLESS STEEL Gr.316
- 2: FLOATS: STAINLESS STEEL Gr.304
- 3: FRAME & FITTINGS: STAINLESS STEEL Gr.316
- 4: BELLOWS: POLYETHYLENE POLYFABRIC (UV STABILIZED)
- 5: CAMLOCKS: STAINLESS STEEL Gr.316


OPTION A: SIDE EXIT HOSE-ASSEMBLY

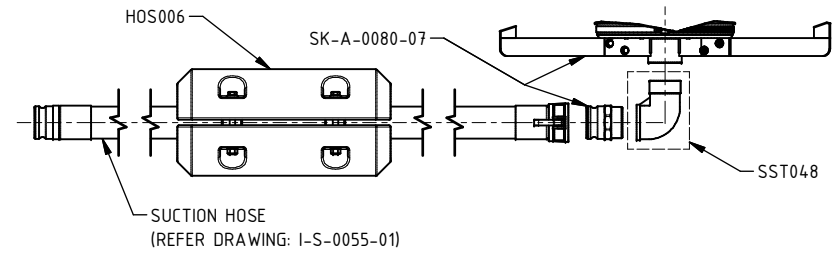

OPTION B: BOTTOM EXIT HOSE-ASSEMBLY

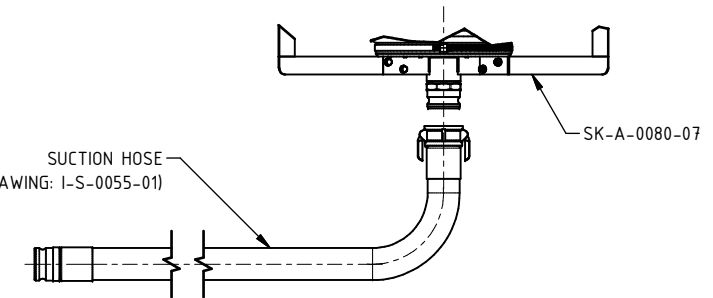


ISO VIEW OF SK-A-0080-07

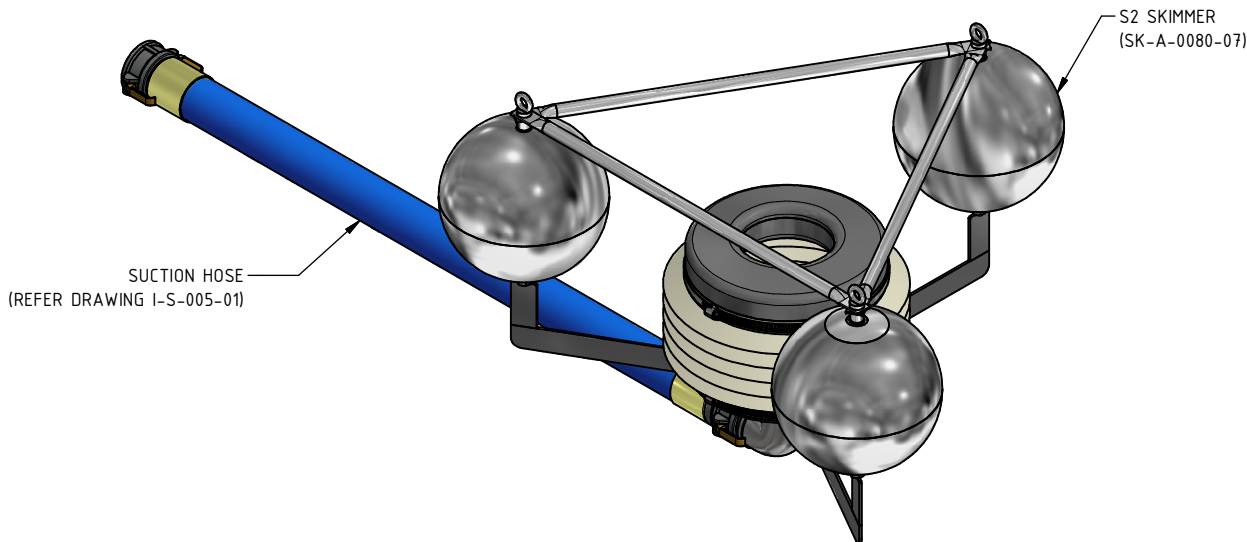

HOSE FLOAT

NOTE:

1. FLOAT/S MUST ALWAYS BE USED WITH OPTION A FOR ALL HOSE LENGTHS
2. FLOAT/S MUST ALWAYS BE USED WITH OPTION B IF TOTAL COMBINED HOSE LENGTH EXCEEDS 6m

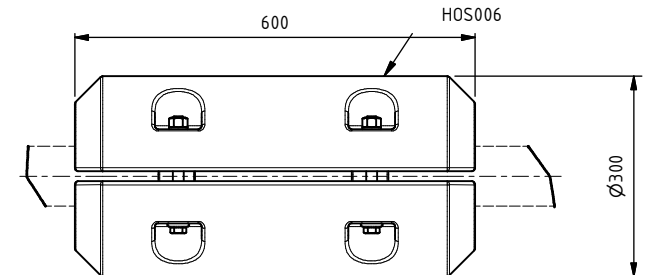

MATERIALS

1. BODY: UV RESISTANT POLYETHYLENE
2. FASTENERS: STAINLESS STEEL Gr.304

REV	DESCRIPTION	DRAWN	CHKD	DATE	DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED
0	ORIGINAL ISSUE	D.C.S.	G.P.	03/06/2013	IF IN DOUBT ASK DO NOT SCALE
1	CHANGED MINIMUM WORKING DEPTH	L.P.	G.P.	19/01/2017	
					THIRD ANGLE PROJECTION UNLESS OTHERWISE STATED



ULTRASPIN PTY LTD
46 WADHURST DRIVE, BORONIA, VIC. 3155
PH +61 3 9800 1100 FAX +61 3 9800 1661

THIS DRAWING IS THE PROPERTY OF ULTRASPIN AND MUST NOT BE USED OR COPIED WITHOUT THEIR WRITTEN PERMISSION. FEATURES OF THE ULTRASPIN PRODUCTS AND PROCESS SHOWN ARE PATENTED OR PATENT PENDING. PROCESS AND EQUIPMENT DESCRIBED SHOULD NOT BE USED WITHOUT PRIOR WRITTEN CONSENT FROM

ULTRASPIN
TM-TRADE MARK OF ULTRASPIN Pty Ltd

CONFIDENTIAL				
TITLE		S2 SKIMMER AND OPTIONS		
CLIENT		GENERAL ISSUE		
SCALE	SIZE	DOC No.	SHEET	REV
NTS	A3	I-S-0050-01	1 of 1	1