

# OIL STORAGE AND DECANT TANK




During industrial treatment of oily water separated more concentrated oily water waste is produced. This concentrated oily water waste can be the oil outlet from a Coalescing Plate Separator, the Reject from an Ultraspın system or simply the fluids pumped from a floating oil skimmer. It is ideal to be able to trap and collect the concentrated oil within the oily water waste, and to remove any excess water. This will mean less frequent and expensive oil collection.

Ultraspın have developed Oil Storage and Decant Tanks that achieve this twin purpose:

- Collect large volumes of concentrated oil
- Automatically drain excess water

**On the outside, Ultraspın's Oil Storage and Decant Tank looks like any other tank but it's what's on the inside that counts!**

## How does it work?

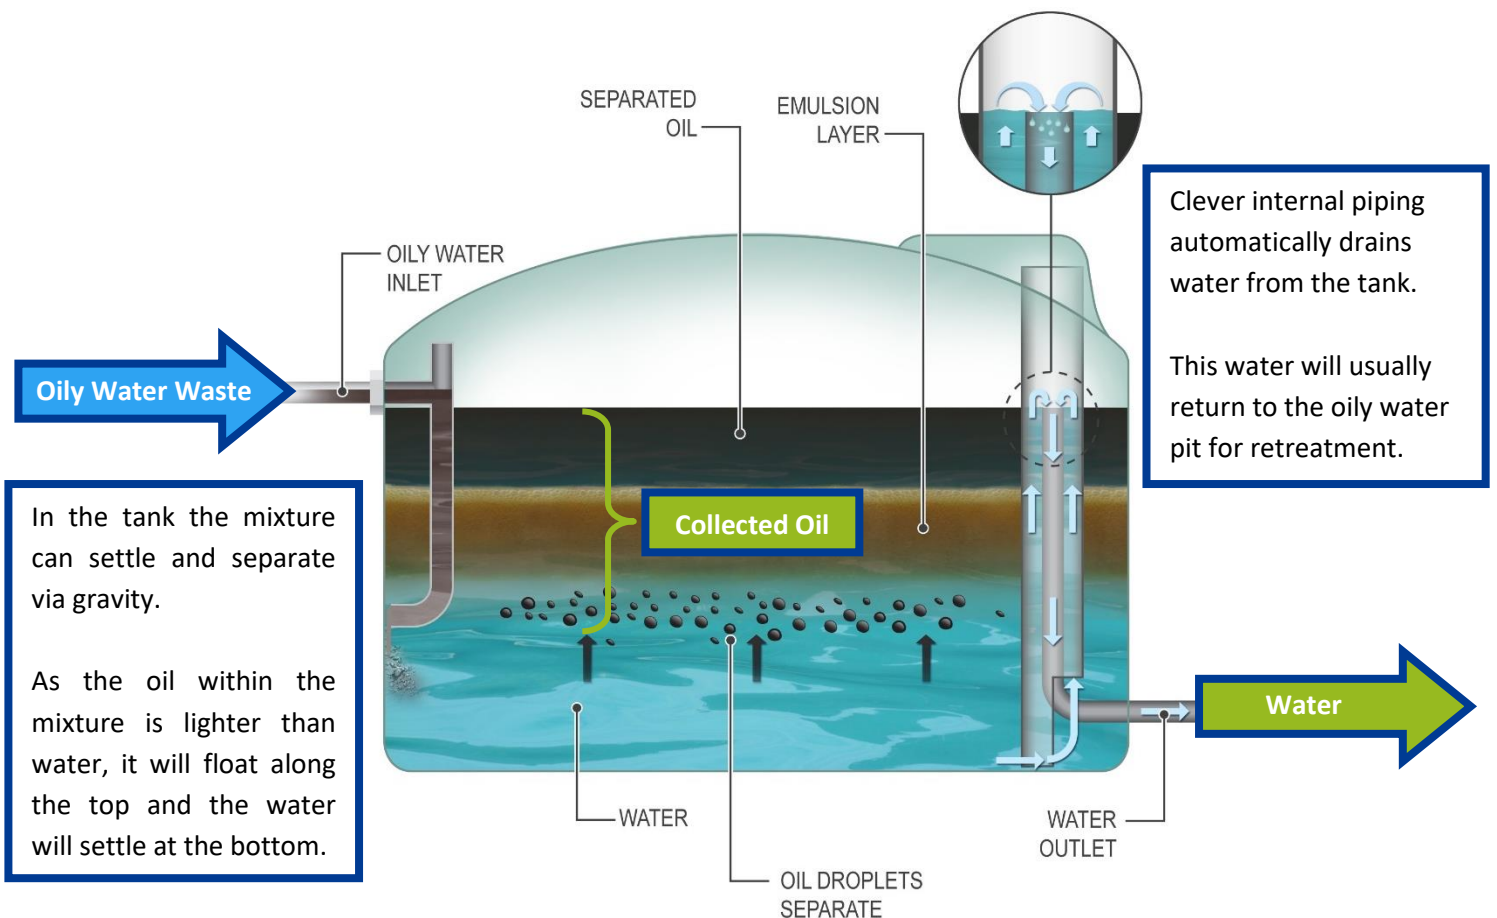

Once the tank is full of concentrated oil, it can be collected. Oil level can be monitored by oil level dipstick included with the tank.